


TECHNICAL INFO

Style 774 is designed for preparing high temperature removable pads, flange and valve covers. It is a fiberglass fabric impregnated with a high temperature, flame retardant, silicone rubber which provides greater life and improved resistance to abrasion, flexing tear and puncture.

- Successfully used in insulation jacketing service since 1992
- Incorporates proven SILVERJAC™ coating technology
- Severe chemical and temperature exposure capabilities
- Variations engineered upon request
- Flame retardant
- Easily sewn

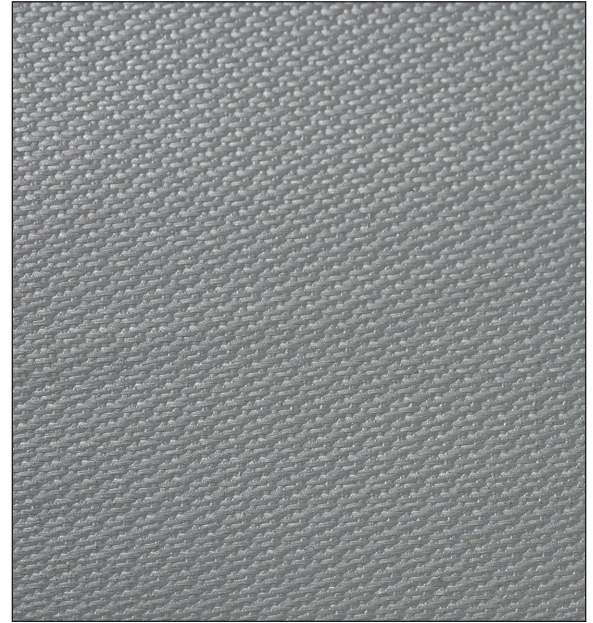

Physical Properties

Characteristic	Values	Test Method
Upper Use Temperature:	480°F (249°C) Continuous service	
Weight:	17 oz/yd ² (557 g/m ²)	ASTM D-751
Thickness:	0.016" (0.41 mm)	ASTM D-751
Width:	0" (1524 mm) Nominal	ASTM D-751
Tensile Strength (Warp):	275 lbs/in (2448 N/50 mm)	ASTM D-751
Tensile Strength (Fill):	210 lbs/in (1869 N/50 mm)	ASTM D-751
Trap. Tear (Warp):	49 lbs (218 N)	ASTM D-751
Trap. Tear (Fill):	220 psi (15.5 kg/cm ²)	ASTM D-751
Burst Strength:	0.1" (2.54mm)	ASTM D-6413
Flame Resistance - Char Length:	3.0 seconds	ASTM D-6413
Flame Resistance - Flame Out:	0.0 seconds	ASTM D-6413

For more information on GLT Products, please call toll-free at 800.874.1748 or online at www.gltproducts.com.



Innovative Insulation Systems

HEADQUARTERS:

6810 Cochran Road | Solon OH 44139 | 440.914.1122 | 440.914.1133 Fax | **1.800.874.1748**

DISTRIBUTION CENTERS:

Ohio: 6810 Cochran Road | Solon OH 44139 | 440.914.1122

Texas: 8905 Market Street | Houston, TX 77029 | 1.800.874.1748

North Carolina: 501 West Camel Street | Greensboro, NC 27401 | 1.800.551.9760

California: 4113 Gold River Lane | Stockton, CA 95215 | 1.800.833.4500

Ontario, Canada: 55 Milburn Road | Hamilton, ON L8E 3C4 | 1.800.874.1748